



FRICITION STAY - HI LOAD (SS304)







Special Features

- Made of AISI 304 stainless steel.
- Pressure adjustable brake for stopping.
- Can be used in wood, aluminium or PVC windows.
- Can be used for side hung horizontal axis opening ventilators, as well as top hung vertical axis opening windows.
- Self cleaning design.
- Finish : Raw Stainless Steel.



Specifications

Code Nos.	L	Side Hung		Top Hung		Load (Kgs)	Max Opening angle	Gap for Stays 'A' (mm)	Min. Width 'B' (mm)	No. of Bars
	Size (Length mm)	Max. Shutter Width (mm)	Max. Shutter Height (mm)	Max. Shutter Width (mm)	Max. Shutter Height (mm)					
FRS 10HL	255 (10")	450	900	900	450	21	90°	15	19	4
FRS 12HL	305 (12")	500	950	950	500	24	90°	15	19	4
FRS 14HL	355 (14")	550	1000	1050	550	30	90°	15	19	5

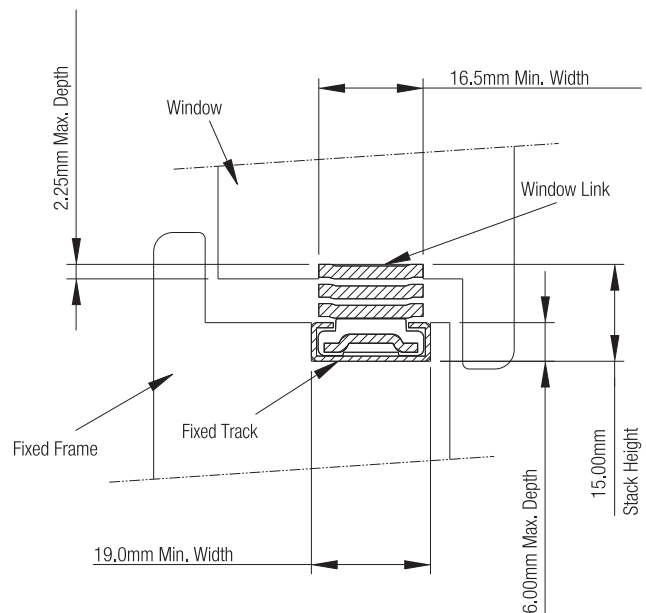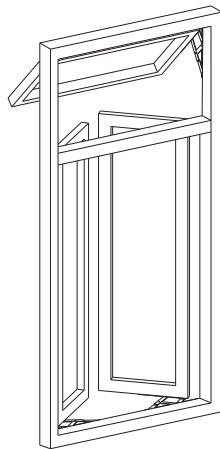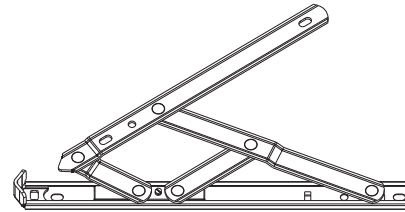

Caution

- Construction rubble & dirt will damage the stay.
- Do not exceed specified load.
- Shutters must have corners at right angles.