




POZI RECESS CSK HEAD CHIPBOARD SCREW



Special Features

- Ideal furniture fastener, providing high pull out resistance.
- Can be reused.
- Manufactured to international specifications and standards.
- Choice of diameters and lengths ensure proper selection for application.

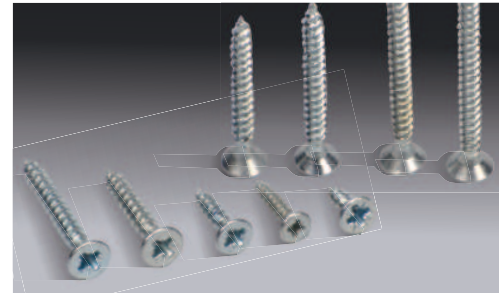

Specifications

Item	Code Nos.	Size in mm	Finish
	CBS 3012	3 x 12 (5 x 12)	Zinc Plated White
	CBS 3016	3 x 16 (5 x 16)	
	CBS 3020	3 X 20 (5 x 20)	
	CBS 3512	3.5 x 12 (6 x 12)	
	CBS 3516	3.5 x 16 (6 x 16)	
	CBS 3520	3.5 x 20 (6 x 20)	
	CBS 3525	3.5 X 25 (6 x 25)	
	CBS 3530	3.5 x 30 (6 x 30)	
	CBS 3535	3.5 x 35 (6 x 35)	
	CBS 4016	4 X 16 (8 x 16)	
	CBS 4020	4 X 20 (8 x 20)	
	CBS 4025	4 X 25 (8 x 25)	
	CBS 4030	4 X 30 (8 x 30)	
	CBS 4035	4 x 35 (8 x 35)	
	CBS 4040	4 X 40 (8 x 40)	
	CBS 4045	4 x 45 (8 x 45)	
	CBS 4050	4 x 50 (8 x 50)	
	CBS 5050	5 x 50 (10 x 50)	
	CBS 6035	6 x 35 (14 x 35)	
	CBS 6050	6 x 50 (14 x 50)	

Pozi Recess CSK Head Chipboard Screw - Hardened Zinc Plated

Recess No.		1	2	2	2	2	3
Pozi Drive	m	Min. 3.00	4.00	4.40	4.80	5.30	6.60
	n	Min. 1.60	1.76	2.05	2.46	2.99	2.99
		Max. 2.01	2.06	2.51	2.92	3.45	3.45

Diameter		3	3.5	4	4.5	5	6
d1	Min.	2.80	3.30	3.75	4.25	4.70	5.70
	Max.	3.00	3.50	4.00	4.50	5.00	6.00
d2	Min.	1.50	1.75	2.02	2.22	2.52	3.22
	Max.	1.90	2.15	2.50	2.70	3.00	3.70
D	Min.	5.70	6.64	7.64	8.64	9.64	11.57
	Max.	6.00	7.00	8.00	9.00	10.00	12.00
p	±10%	1.35	1.60	1.80	2.00	2.20	2.60
a	Max.	1.60	1.80	2.00	2.20	2.50	3.00
b	Max.	1.90	2.10	2.50	2.70	3.00	3.60
r	Min.	1.20	1.50	1.60	1.80	2.00	2.00
	Max.	1.60	1.90	2.10	2.30	2.60	2.60

Breaking Torque	Min/Nm.	1.50	2.00	3.00	4.30	6.20	10.80
Bending Angle	Min.	15°	15°	15°	15°	15°	15°

Length	12	16	20	25	30	35	40	45	50	60	70
Tol. ±	0.90	0.90	1.05	1.05	1.05	1.25	1.25	1.25	1.25	1.50	1.50

Material	C-1022 Steel Heat treated Case Hardened
Surface Hardness	Min. 450 HV 0.3
Surface Finish	Zinc Plated with Blue Passivation

